


Manufacturer	PCR s.r.l.
Chassis model	ADVANCE DD2
Category	ROTAX MAX Challenge, 125 MAX DD2 class
Validity of approval	without limitation
Date of approval by BRP-ROTAX	(to be filled in by BRP-ROTAX)

Technical definiton of the frame	
Built according to CIK regualtions for short circuits karts	

Technical definition of the components of the chassis			
Brake system:	Designed according to CIK rules for shifter classes.		
	A brake system with a valid CIK Homologation must be used.		
Bodywork:	Designed according to CIK rules for short circuit karts.		
	A bodywork with a valid CIK Homologation must be used.		
Rear Tire Protection System:	For the participation at national or international ROTAX MAX		
	Challenge race, the ROTAX Rear Tire Protection System must be used.		

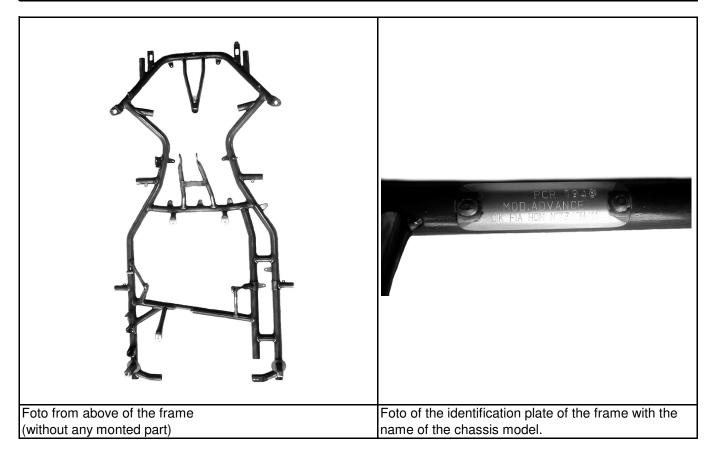

Technical description	Dimensions	Tolerance
Outer diameter of the main tubes (without painting)	30/32 mm	+/- 0,5 mm
Rear width of main tubes (center line to center line)	615 mm	+/- 5,0 mm
Distance of the rear two main tubes on the right side (center	92 mm	+/- 0,5 mm
line to center line)		
Wheelbase	1060 mm	+/- 5,0 mm

Technical description	Figure
Number of adjustable/removeable stabilizers at the frame	2

